



High power flexible LED wall washer is a revolutionary product which uses special molded design, flexible light body can be bent at any angle, IP66 waterproof rate, high brightness, beam angle adjustable, easy to install. Flexible LED wall washer is the best alternative to normal linear wall washer.


Parameter

Item No.:	WK-FW-002-24V-3030	WK-FW-002-240V-3030
Light Source:	3030LED 3030 High power LED	
Input Voltage:	DC24V	240V
Watt:	19.9W/ 19.9W/m	18.3W/ 18.3W/m
IP Rate:	IP66	
Spce:	(0.05M)/ 1 LED(0.05M)/unit	(0.5M)/ 10 LED(0.5M)/unit
Luminous:	1000 LM	
Color:	R,G,B,Y,A,WW,W	
Beam angle:	30°	
Material:	TPE ThermoPlastic	
Working Temperature:	-30°C~+50°C	
Length:	0.5m/1m/5m	0.5m/1m/25m
Max loading length:	5m	25m

Features

- Use two injection type structure, light body one time molding, perfect waterproof performance which can achieve IP66.
- Available special lenses with different light-emitting angles, beam angle can be adjustable.
- High power LED light source, 1000Lm/m.
- Lighting uniformity when multiple lamps connected, no dark area between units.
- Easy to be installed. No matter linear connection or arc connection, minimum bend radius up to 2.5CM.
- Light body use soft thermo plastic material, anti-impact force, not easily broken.
- Mini Light body, only 2cm width, good for hiding.

Structure

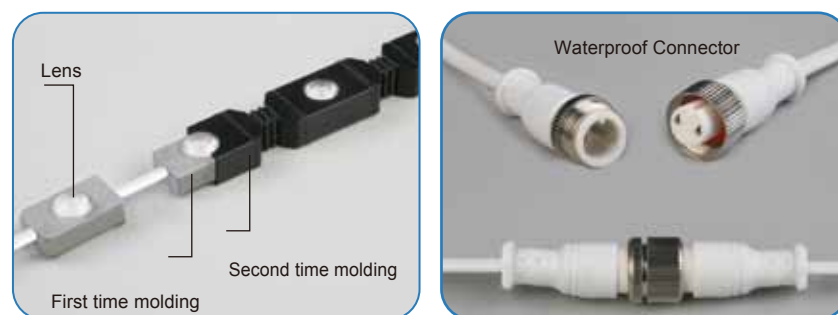

Installation



seamless connection



curve installation



concave installation




5cm bend angle-5cm diameter

Lighting effect



Product Size

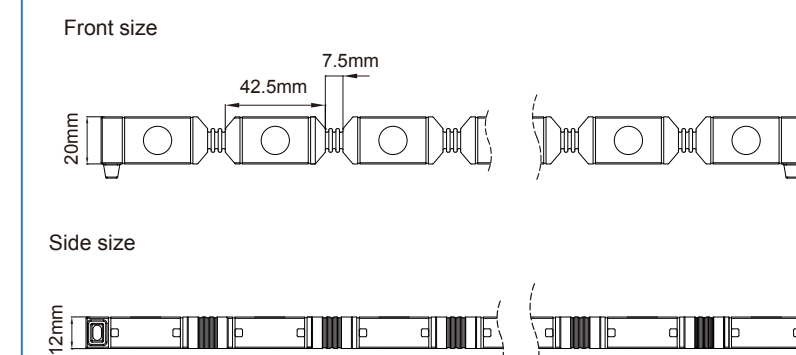

Intellectual Property protection


All promotional items photographed in the catalog are protected by intellectual rights. Under no circumstances can any logo, trade mark and photograph be reproduced to any catalog and media or photocopied to a third party without the permission of the legal owner. Any infringement of intellectual rights in structure patent, design patent and trade mark in the catalog is a serious offence and all violators will be prosecuted.

Notice

Product details are subject to changes of appearance and specifications without prior notice, please refer to the user's manuals.




Connection

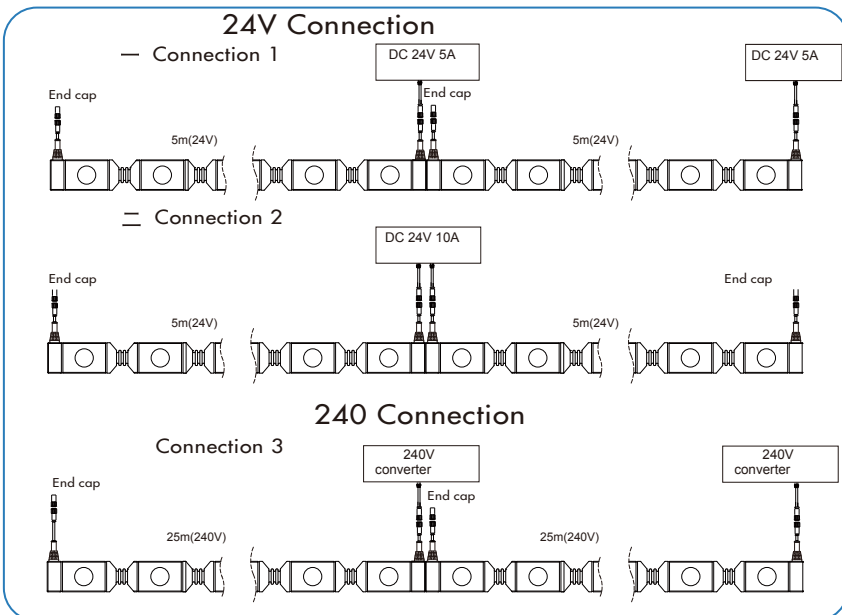

Specification:Flexible Wall Washer VS Mini Wall Washer

	Flexible wall washer	Mini wall washer
IP Rate	IP66	IP65
Bend radius	2.5 cm	80cm
Fixed point needed for 100m arc connection	Less than 100 points	820 points
Size	width: 2cm height: 1.2cm	length:19cm width: 7.6cm height: 8.7cm
Material	Plastic(Impact resistance)	Aluminum(non Impact resistance)


Size:Flexible Wall Washer VS Mini Wall Washer

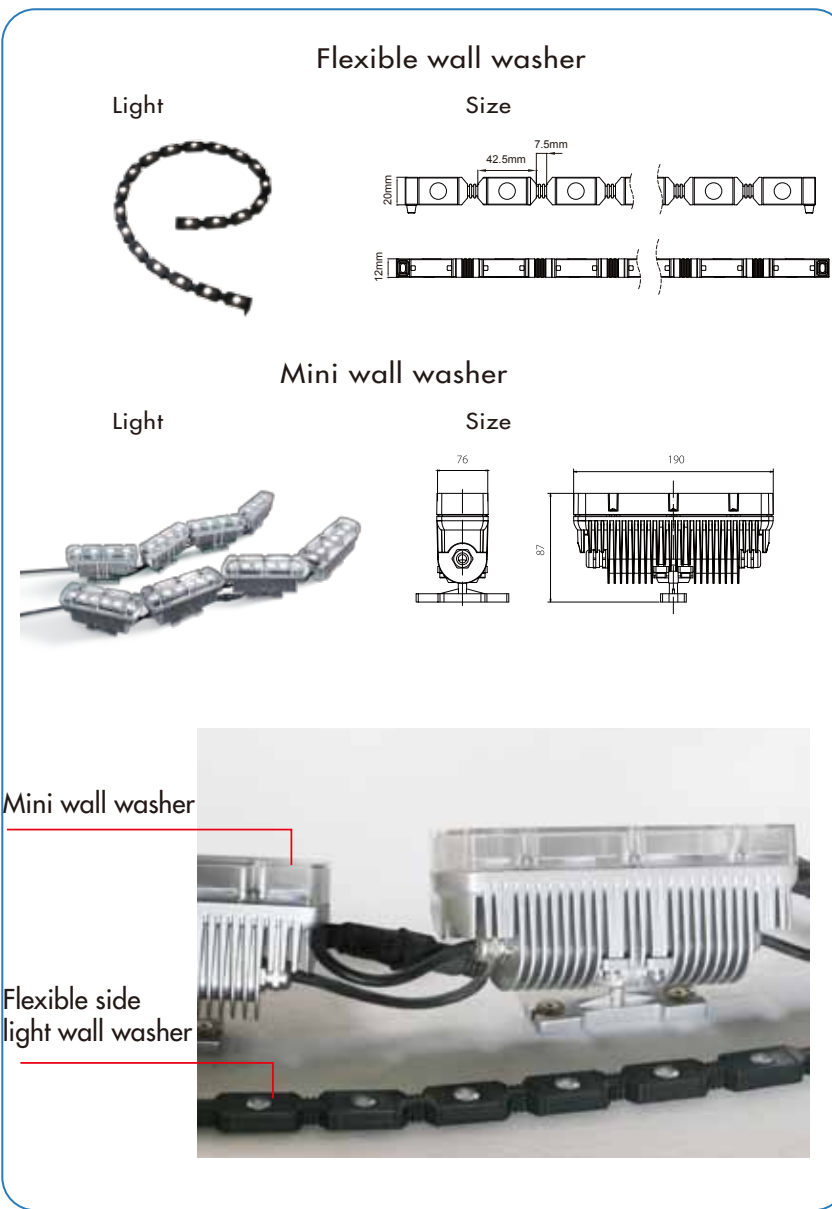

Lighting Effect:Flexible Wall Washer VS Mini Wall Washer



Flexible Wall Washer Projects Photos

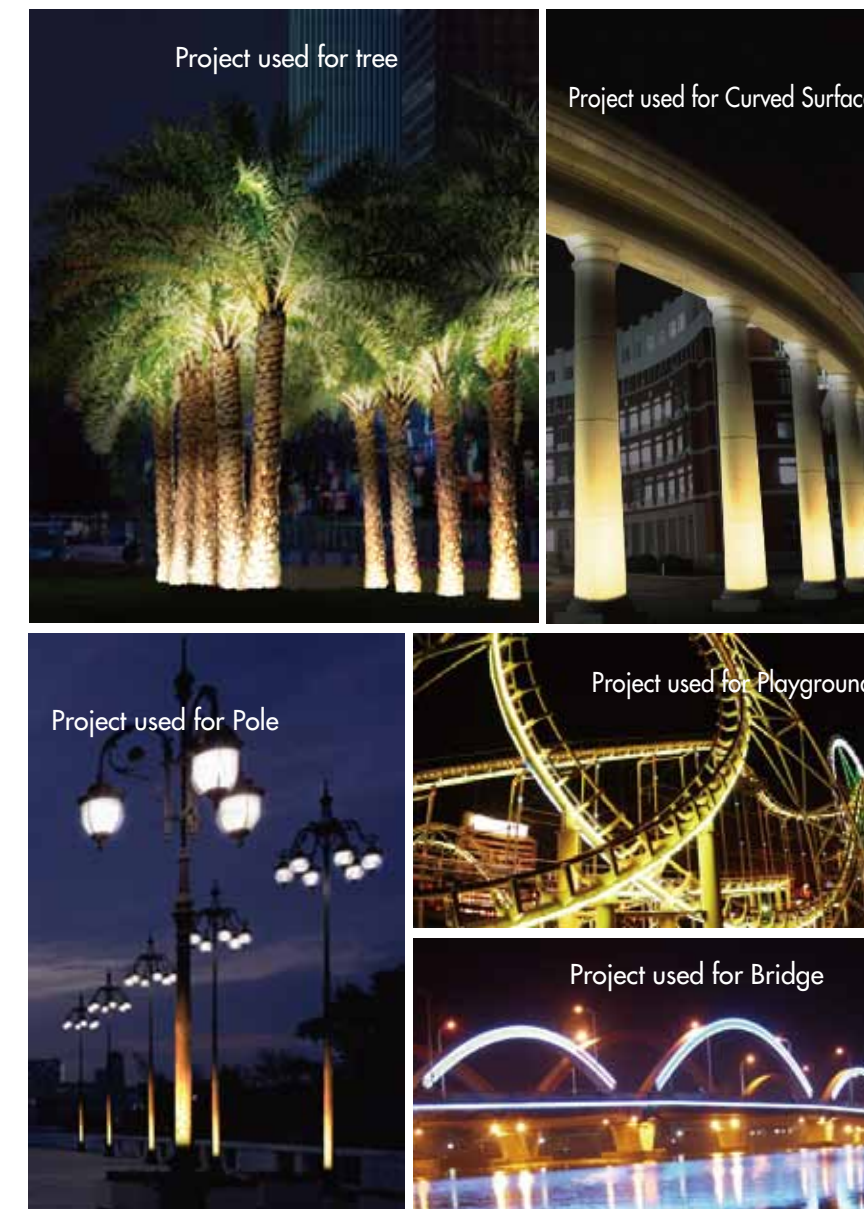

LED High Power Flexible Wall Washer