

Specification Sheet for COB Flexible LED Strips



Applications:


- ◆ Car decoration
- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting

Product features:

- ◆ Various angle 170 degrees
- ◆ With adhesive tape on backside
- ◆ Made of high quality LEDs
- ◆ Work Voltage: DC24V version
- ◆ No Light Spot
- ◆ UL, CUL, CE, ROHS Approved



Dimensions Drawing

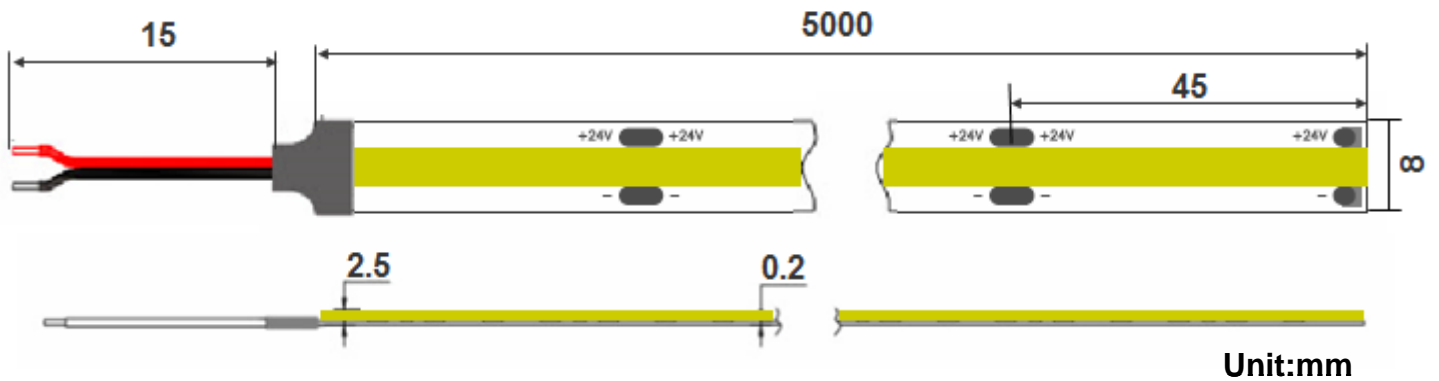


Specifications

Model No.	Work Voltage	Power	View Angle	Waterproof	CRI	Luminous(lm/m)	(CT:K)	
	-WW-24-COB	DC24V	14W/m	170°	IP20 IP54 IP67 IP68	≥90	1250-1300lm	2700K
	-W-24-COB	DC24V	14W/m	170°		≥90	1300-1350lm	3000K
	-N-24-COB	DC24V	14W/m	170°		≥90	1350-1400lm	4000K
	-P-24-COB	DC24V	14W/m	170°		≥90	1400-1450lm	6000K

Remark: X is for Waterproof type. A for Non-waterproof, S for IP54, C for IP67, D for IP68 Version

Connection drawings

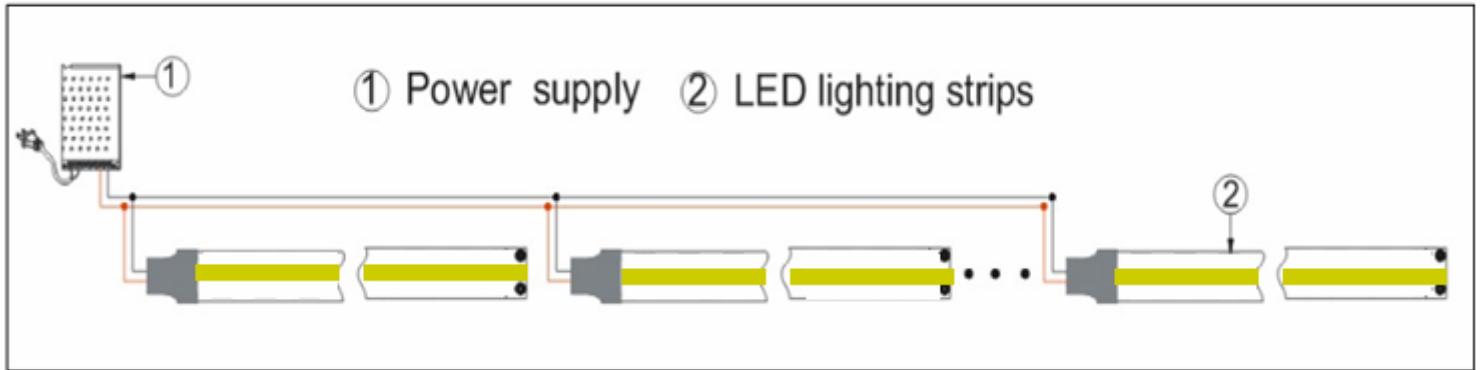

Notice:

Before application, please make sure the power supply is in accordance to the strips

