



**Minimalistic and Ultra-narrow
Media Facade Application
LED Linear Light**

LL16


Features

- Minimalistic appearance design.
- The outdoor self-cleaning design ensures greater performance and higher reliability.
- High-strength aviation aluminum housing.
- Weathering and UV resistant PC diffuser.
- Optical dark-free zone design for seamless splicing of uniform light.
- International standard DMX512 protocol.




RAL7012 RAL9006 RAL9003


Light Distribution Curve



H(m)	E(lx)	D(m)
		130°
1	80	4.29
2	20	8.58
3	9	12.87
4	5	17.16
5	3	21.45



Dimensions

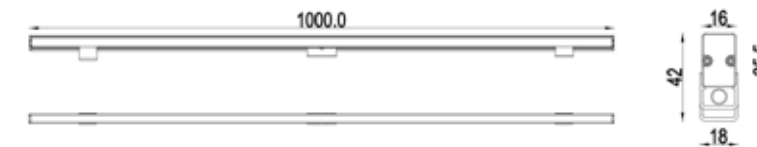

Specifications

Power Consumption	12W	12W	12W
Luminous Flux	300 lm @4000K		
Color Temperature	2700K / 3000K / 4000K / 5000K / 5700K / 6500K	RGB	RGBW
Beam Angle (50%Imax)	130°		
LED Brand	CREE / NICHIA / OSRAM / LUMILEDS		
Input Voltage	DC24V		
Protection Class IEC	III		
Control	DMX / RDM / ON-OFF	DMX / RDM	DMX / RDM
Pixel	8		
Finish	Powder coating / Anode oxidation		
Housing	Extruded aluminum 6063		
Diffuser	High strength optical PC		
IP Rating	IP65		
IK Rating	IK10		
Mounting	Buckle		
Operating Temperature	-35°C ~ 60°C (-31°F ~ 140°F)		
Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)		
Lifespan	>50,000Hrs (Ta=35°C@L70)		
Certificate	CE / RoHS / EMC		





**Wide Visual Angle
Media Facade Application
LED Linear Light**

LL25

Features


- Minimalistic appearance design.
- The outdoor self-cleaning design ensures greater performance and higher reliability.
- High-strength aviation aluminum housing.
- Weathering and UV resistant PMMA diffuser.
- Optical dark-free zone design for seamless splicing of uniform light.
- International standard DMX512 protocol.




RAL7012 RAL9006 RAL9003




Light Distribution Curve



H(m)	E(k)	D(m)
		150°
1	192	7.64
2	48	14.93
3	21	22.39
4	12	29.86
5	8	37.32



Dimensions

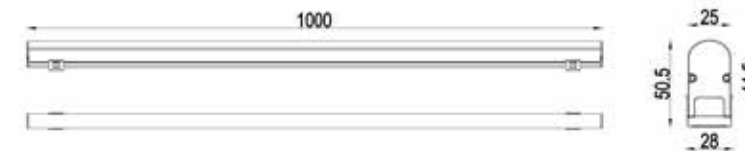

Specifications

Power Consumption	12W	12W	12W
Luminous Flux	840 lm @4000K		
Color Temperature	2700K / 3000K / 4000K / 5000K / 5700K / 6500K	RGB	RGBW
Beam Angle (50%Imax)	150°		
LED Brand	CREE / NICHIA / OSRAM / LUMILEDS		
Input Voltage	DC24V		
Protection Class IEC	III		
Control	DMX / RDM / ON-OFF	DMX / RDM	DMX / RDM
Pixel	8		
Finish	Powder coating / Anode oxidation		
Housing	Extruded aluminum 6063		
Diffuser	High strength optical PMMA		
IP Rating	IP65		
IK Rating	IK10		
Mounting	Buckle		
Operating Temperature	-35°C ~ 60°C (-31°F ~ 140°F)		
Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)		
Lifespan	>50,000Hrs (Ta=35°C@L70)		
Certificate	CE / RoHS / EMC		



Minimalistic and High-brightness Media Facade Application LED Linear Light

LL28

Features


- Minimalistic appearance design.
- The outdoor self-cleaning design ensures greater performance and higher reliability.
- High-strength aviation aluminum housing.
- Weathering and UV resistant PMMA diffuser.
- Optical dark-free zone design for seamless splicing of high-brightness light.
- International standard DMX512 protocol.




RAL7012 RAL9006 RAL9003




Light Distribution Curve



H (m)	E (lx)	D (m)
		110°
1	380	2.86
2	95	5.71
3	42	8.57
4	24	11.43
5	15	14.28



Dimensions

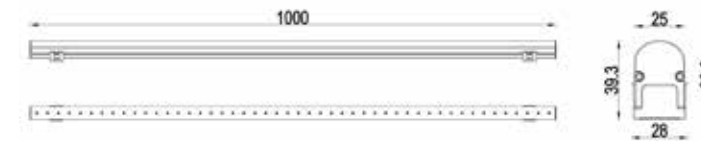

Specifications

Power Consumption	12W	12W	12W
Luminous Flux	1020 lm @4000K		
Color Temperature	2700K / 3000K / 4000K / 5000K / 5700K / 6500K	RGB	RGBW
Beam Angle (50%Imax)	110°		
LED Brand	CREE / NICHIA / OSRAM / LUMILEDS		
Input Voltage	DC24V		
Protection Class IEC	III		
Control	DMX / RDM / ON-OFF	DMX / RDM	DMX / RDM
Pixel	8		
Finish	Powder coating / Anode oxidation		
Housing	Extruded aluminum 6063		
Diffuser	High strength optical PMMA		
IP Rating	IP65		
IK Rating	IK10		
Mounting	Buckle		
Operating Temperature	-35°C ~ 60°C (-31°F ~ 140°F)		
Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)		
Lifespan	>50,000Hrs (Ta=35°C@L70)		
Certificate	CE / RoHS / EMC		



**Wide Visual Angle
Media Facade Application
LED Linear Light**

LL30


Features

- Minimalistic appearance design.
- The outdoor self-cleaning design ensures greater performance and higher reliability.
- High-strength aviation aluminum housing.
- Weathering and UV resistant PC diffuser.
- Optical dark-free zone design for seamless splicing of uniform light.
- International standard DMX512 protocol.




RAL7012 RAL9006 RAL9003

Light Distribution Curve



H(m)	E(lx)	D(°)
		150°
1	199	7.64
2	50	14.93
3	22	22.39
4	12	29.86
5	8	37.32



Dimensions



Specifications

Power Consumption	12W	12W	12W
Luminous Flux	870 lm @4000K		
Color Temperature	2700K / 3000K / 4000K / 5000K / 5700K / 6500K	RGB	RGBW
Beam Angle (50%Imax)	150°		
LED Brand	CREE / NICHIA / OSRAM / LUMILEDS		
Input Voltage	DC24V		
Protection Class IEC	III		
Control	DMX / RDM / ON-OFF	DMX / RDM	DMX / RDM
Pixel	8		
Finish	Powder coating / Anode oxidation		
Housing	Extruded aluminum 6063		
Diffuser	High strength optical PC		
IP Rating	IP65		
IK Rating	IK10		
Mounting	Buckle		
Operating Temperature	-35°C ~ 60°C (-31°F ~ 140°F)		
Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)		
Lifespan	>50,000Hrs (Ta=35°C@L70)		
Certificate	CE / RoHS / EMC		

